


Operator
Telephone
Fax
e-Mail

Помещение течни пускатели-аварийно осветление / Summary

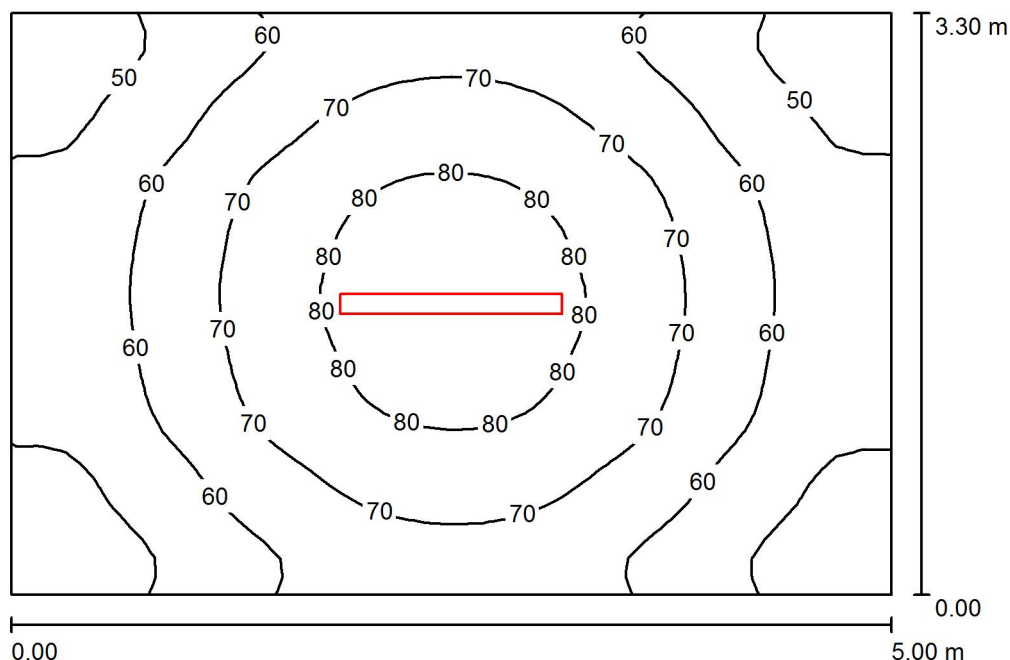

Height of Room: 3.500 m, Mounting Height: 3.500 m

Values in Lux, Scale 1:43

Surface	ρ [%]	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	u0
Workplane	/	64	42	86	0.654
Floor	20	64	43	86	0.674
Ceiling	70	23	15	110	0.646
Walls (4)	50	47	23	98	/

Workplane:

Height: 0.000 m
Grid: 32 x 32 Points
Boundary Zone: 0.000 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.738, Ceiling / Working Plane: 0.367.

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	1	2R E Plus Pro LED SMD 40W IP65 L1200 LED Waterproof Luminaires (1.000)	4396	4400	40.0
Total:			4396	4400	40.0

Specific connected load: $2.42 \text{ W/m}^2 = 3.79 \text{ W/m}^2/100 \text{ lx}$ (Ground area: 16.50 m^2)