


Operator
Telephone
Fax
e-Mail

Помещение техни пускатели-редовно осветление / Summary

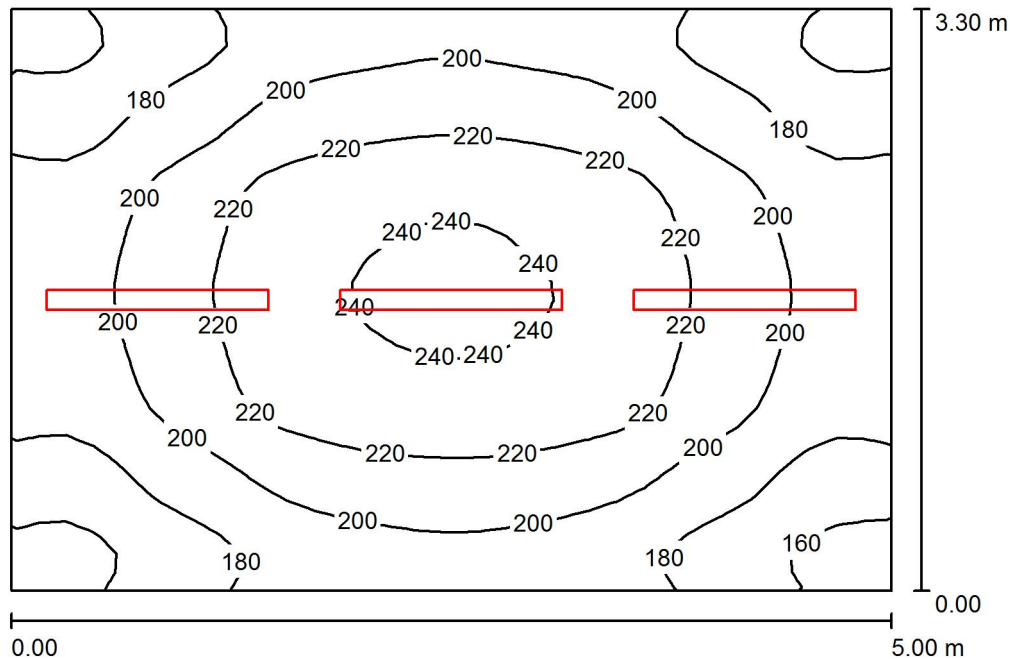

Height of Room: 3.500 m, Mounting Height: 3.500 m

Values in Lux, Scale 1:43

Surface	ρ [%]	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	$u0$
Workplane	/	201	147	244	0.730
Floor	20	201	151	244	0.747
Ceiling	70	85	52	228	0.617
Walls (4)	50	167	81	893	/

Workplane:

Height: 0.000 m
Grid: 32 x 32 Points
Boundary Zone: 0.000 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.834, Ceiling / Working Plane: 0.423.

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	3	2R E Plus Pro LED SMD 40W IP65 L1200 LED Waterproof Luminaires (1.000)	4396	4400	40.0
Total:			13188	13200	120.0

Specific connected load: $7.27 \text{ W/m}^2 = 3.61 \text{ W/m}^2/100 \text{ lx}$ (Ground area: 16.50 m^2)