


Operator  
Telephone  
Fax  
e-Mail

## Съблекалня / Summary

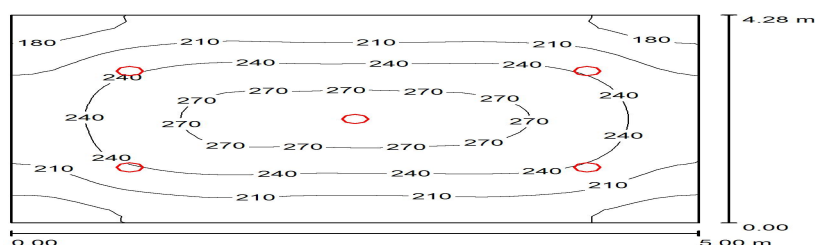

Height of Room: 2.560 m, Mounting Height: 2.560 m, Maintenance factor: 0.80

Values in Lux, Scale 1:55

Surface	$\rho$ [%]	$E_{av}$ [lx]	$E_{min}$ [lx]	$E_{max}$ [lx]	$u_0$
Workplane	/	228	153	285	0.673
Floor	30	228	154	284	0.675
Ceiling	70	75	55	87	0.740
Walls (4)	50	159	64	315	/

### Workplane:

Height: 0.000 m  
Grid: 32 x 32 Points  
Boundary Zone: 0.000 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.694, Ceiling / Working Plane: 0.329.

### Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	$\Phi$ (Luminaire) [lm]	$\Phi$ (Lamps) [lm]	P [W]
1	5	2R CAPRI R/S 24W LED Downlight (1.000)	1919	1920	24.0
Total:			9597	9600	120.0

Specific connected load:  $5.61 \text{ W/m}^2 = 2.46 \text{ W/m}^2/100 \text{ lx}$  (Ground area:  $21.40 \text{ m}^2$ )