


Operator
Telephone
Fax
e-Mail

Akumulatorno / Summary

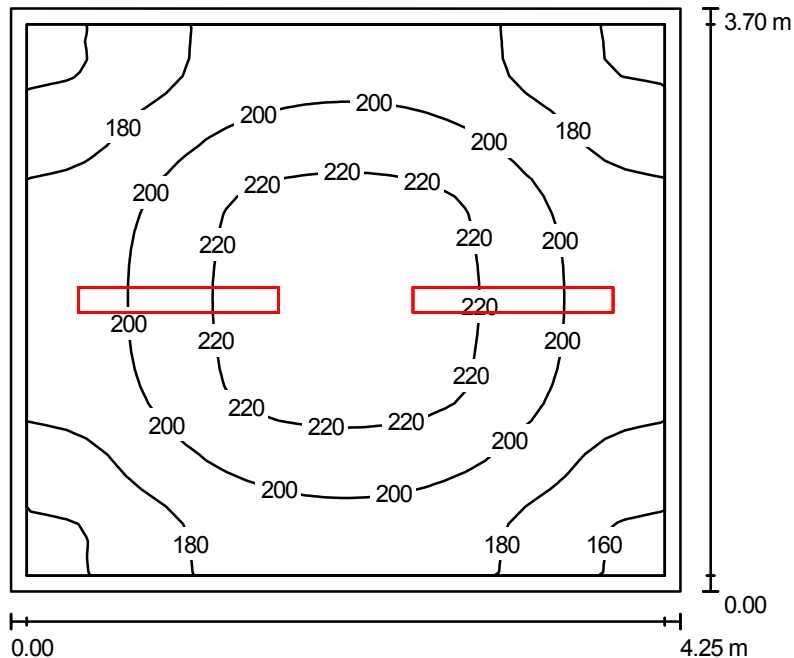

Height of Room: 3.200 m, Mounting Height: 3.200 m, Maintenance factor: 0.80

Values in Lux, Scale 1:48

Surface	ρ [%]	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	u_0
Workplane	/	196	154	229	0.788
Floor	20	180	134	212	0.744
Ceiling	70	129	66	748	0.516
Walls (4)	50	167	91	370	/

Workplane:

Height: 0.200 m
Grid: 32 x 32 Points
Boundary Zone: 0.100 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.873, Ceiling / Working Plane: 0.658.

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	2	2R Ltd E Plus Pro M 2x36W IP65 PC Fluorescent Luminaires-Waterproof (1.000)	4476	6700	91.0
Total:			8951	13400	182.0

Specific connected load: $11.57 \text{ W/m}^2 = 5.91 \text{ W/m}^2/100 \text{ lx}$ (Ground area: 15.72 m^2)