




Operator  
Telephone  
Fax  
e-Mail

## Площадка Ac 6300 / Summary

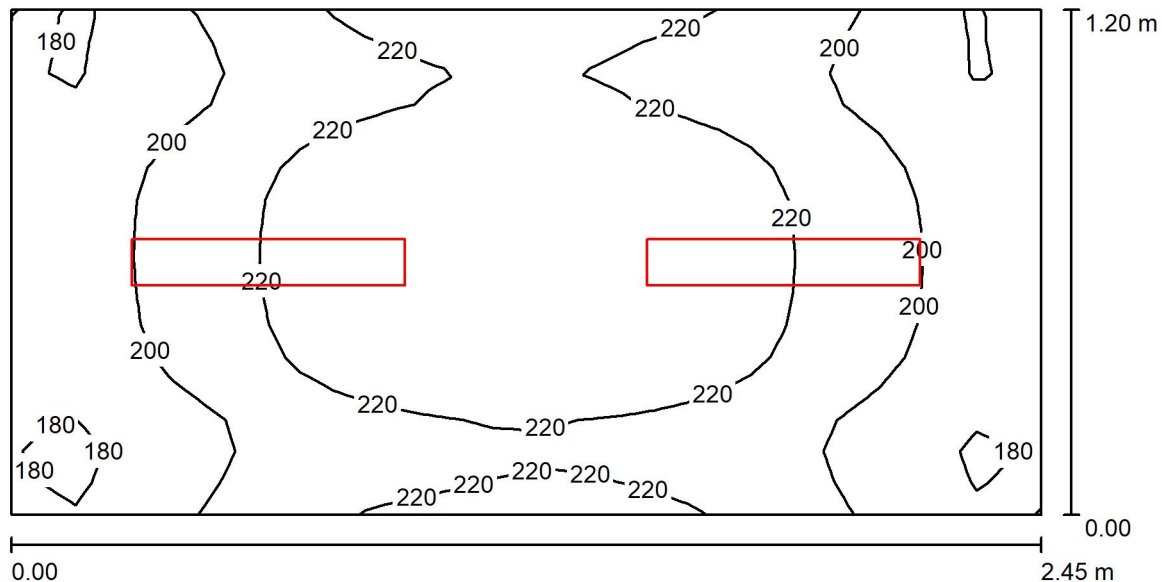

Height of Room: 2.500 m, Mounting Height: 2.500 m

Values in Lux, Scale 1:18

Surface	$\rho$ [%]	$E_{av}$ [lx]	$E_{min}$ [lx]	$E_{max}$ [lx]	$u_0$
Workplane	/	210	174	237	0.826
Floor	10	210	172	236	0.821
Ceiling	70	154	104	218	0.675
Walls (4)	50	247	77	673	/

### Workplane:

Height: 0.000 m  
Grid: 32 x 16 Points  
Boundary Zone: 0.000 m

Illuminance Quotient (according to LG7): Walls / Working Plane: 1.176, Ceiling / Working Plane: 0.733.

### Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	$\Phi$ (Luminaire) [lm]	$\Phi$ (Lamps) [lm]	P [W]
1	2	2R E Plus Pro LED SMD 20W IP65 L600 LED Waterproof Luminaires (1.000)	2198	2200	20.0
Total:			4396	4400	40.0

Specific connected load:  $13.61 \text{ W/m}^2 = 6.48 \text{ W/m}^2/100 \text{ lx}$  (Ground area:  $2.94 \text{ m}^2$ )