




Operator
Telephone
Fax
e-Mail

Помещение 1 / Summary

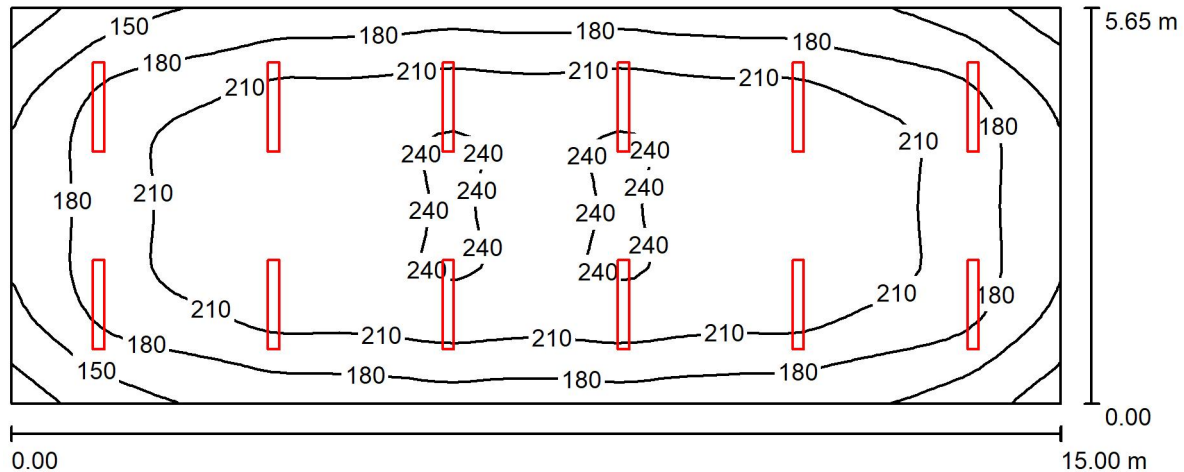

Height of Room: 2.700 m, Mounting Height: 2.700 m

Values in Lux, Scale 1:108

Surface	ρ [%]	E_{av} [lx]	E_{min} [lx]	E_{max} [lx]	$u0$
Workplane	/	200	109	243	0.542
Floor	10	200	106	243	0.529
Ceiling	70	34	29	48	0.855
Walls (4)	30	130	74	231	/

Workplane:

Height: 0.000 m
Grid: 64 x 32 Points
Boundary Zone: 0.000 m

UGR

Left Wall
Lower Wall
(CIE, SHR = 1.00.)

Lengthways-

24
22

Across

22
21

to luminaire axis

Illuminance Quotient (according to LG7): Walls / Working Plane: 0.649, Ceiling / Working Plane: 0.172.

Luminaire Parts List

No.	Pieces	Designation (Correction Factor)	Φ (Luminaire) [lm]	Φ (Lamps) [lm]	P [W]
1	12	2R LED Waterproof Luminaires E PLUS PRO LED T8 2x18W IP65 L1200 (1.000)	3199	3200	36.0
Total:			38387	38400	432.0

Specific connected load: $5.10 \text{ W/m}^2 = 2.55 \text{ W/m}^2/100 \text{ lx}$ (Ground area: 84.75 m^2)